


Dura-line XD 14 and XD⁺ 14

Robust, cost-efficient, wireless flat panel detector

Versatile, robust and cost-effective, Dura-line XD 14 and XD⁺ 14 wireless DR detectors provide exquisite image quality, with a 14 x 17" (36 x 43 cm) field of view, choice of 1 or 2 batteries for extended battery autonomy, and a Cesium Iodide scintillator.

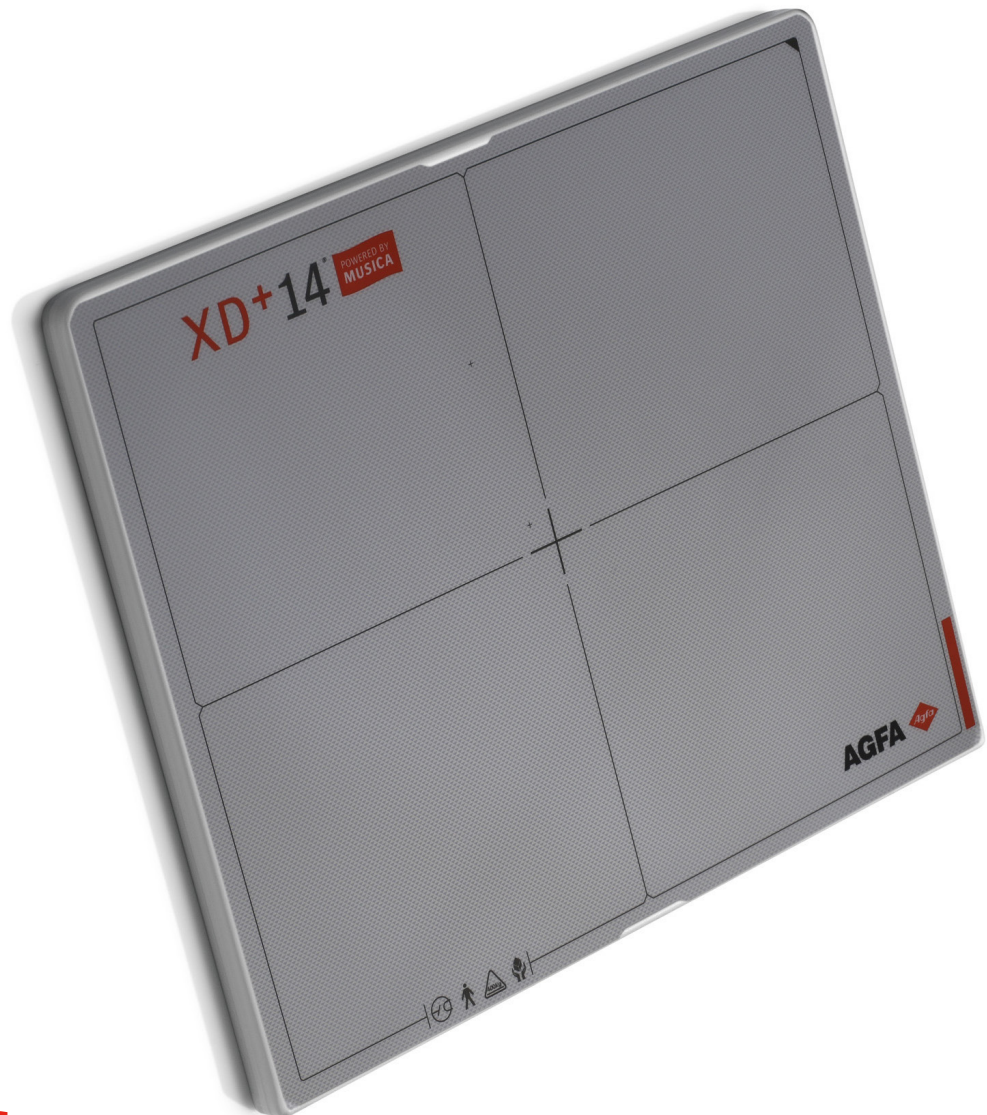

XD 14 POWERED BY MUSICA

AGFA Agfa

Technical Specifications

COMMERCIAL NAME: XD 14 AND XD+ 14

DETECTOR

- **Model:**
 - XD 14 scintillator type A (FXRD-3643VAW)
 - XD+14 scintillator type B (FXRD-3643VAW PLUS)
- **Image Sensor:** TFT: a-Si (Amorphous Silicon)
- **X-ray Scintillator Type:** CsI (Cesium iodide)
- **Pixel Pitch:** 140µm
- **Field of View:** 36cm x 43cm (14" x 17")
- **Active Area (H x V):** 358.4mm x 430.08mm
- **Active Array:** 2560 x 3072 pixels
- **Effective Area:** 355.04mm x 426.72mm
- **Effective Array:** 2536 x 3048 pixels
- **Grayscale:** 16 bit
- **Spatial Resolution:** Min. 3.5 lp/mm
- **Image Acquisition Time (Wired):** Up to 3 sec.
(Set exposure time to 500ms / except exposure time)
- **Image Acquisition Time (Wireless):** Up to 3 sec.
(IEEE802.11ac, MiMO 3x3, 5GHz, 80MHz)
(Exposure time is set to 500ms, except exposure time)
- **Cycle Time:** Min. 4 sec.
(with optimal wired / wireless environment, exposure time is set to 500ms, excluding software processing time)
- **X-ray Synchronous Control:**
 - AED (Auto Exposure Detection)
 - DR Trigger (External Line Trigger)
- **IPX Rating:** IP67
- **Power Supply:**
 - Powered from SCU via tether interface cable: DC 24V, Max. 1.0A
 - Powered via AC-DC adapter: DC 18V, Max. 4.44A
 - Powered via 2 battery packs: DC 9 ~13.2V, Max. 78.54Wh
- **Power Consumption:**
 - Max. 24W (without battery charged) - -
 - Max. 80 W (when charging battery)
- **Operating Time Battery:**
 - One battery pack: 7.5 hours
(image acquired every 100 seconds), 8 hours (standby)
 - Two battery packs: 15 hours
(image acquired every 100 seconds), 16 hours (standby)
- **Dimensions (H x W x D):**
384.0 mm x 460.0mm x 15.0mm
- **Weight:**
 - Model XD 14: One battery pack: 2.95kg
Two battery packs: 3.15kg
 - Model XD+ 14: One battery pack: 3.1kg
Two battery packs: 3.3kg

- **Load limit:**
 - At Surface: 400kg
 - At Point: 200kg
- **Image Transmission:**
 - Wired: Gigabit Ethernet (1000BASE-T) via Power over Ethernet (PoE)
 - Wireless: IEEE 802.11n / ac (2.4GHz / 5GHz), 3 antennas

WIRELESS COMMUNICATION

- **Wireless standard:** IEEE 802.11n/ac
- **Frequency range:**
 - 2.412 ~ 2.472GHz (13 Channels)
 - 5.18 ~ 5.24GHz (4 Channels)
 - 5.745 ~ 5.805GHz (4 Channels)
- **Data transmission rate:**
 - Max. 300Mbps (IEEE802.11n, MIMO 2x2, 5GHz, 40MHz)
 - Max. 1300Mbps (IEEE802.11ac, MIMO 3x3, 5GHz, 80MHz)
- **Modulation:** BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
- **Transmission power:**
 - 2.4GHz: Max. 19dBm (per chain)
 - 5GHz: Max. 18dBm (per chain)
- **Security:** WPA2-PSK
- **Antenna:** Dual Band Antennas (3EA, In-built)

ENVIRONMENTAL USE

- **Temperature**
 - Operation: 0 ~ +40°C
 - Storage & Transportation: -15 ~ +55°C
- **Humidity**
 - Operation: 5 ~ 90% (Non-condensing)
 - Storage & Transportation: 5 ~ 90% (Non-condensing)
- **Atmospheric pressure**
 - Operation: 700 ~ 1060 hPa
 - Storage & Transportation: 500 ~ 1060 hPa
- **Shock**
 - Operation: 20G
 - Storage & Transportation: 30G
- **Vibration**
 - Operation: 2G
 - Storage & Transportation: 5G
- **Drop Limit**
 - Operation: 1,000mm
 - Storage & Transportation: 1,000mm

DURA-LINE FLAT PANEL DETECTOR

BATTERY PACK

- Model: FXRB-04A
- Type: Lithium Ion Polymer
- Nominal Voltage: DC +11.55V
- Nominal Capacity: 3,400mAh
- Number of Cells: 3S1P (3 Series 1 Parallel)
- Battery Life: Approx. 800 times
(One time standard: Fully charged and then fully discharged)
- Dimensions (H × W × D):
189.0mm × 89.0mm × 6.65mm (max.)
- Weight: 185g (max.)

BATTERY CHARGER, CAN CHARGE UP TO 2 DETECTOR BATTERIES


- Model: FXRC-04A
- Nominal Voltage: DC +24V
- Dimensions (H × W × D): 230.0mm × 304.0mm × 15.5mm
- Weight: 450gr

CRADLE CHARGER, CAN CHARGE UP TO 2 DETECTORS

- Model: FXRR-01A
- Dimensions (H × W × D): 159.0mm × 410.0mm × 168.0mm
- Weight: 4.04kg



DQE SPECIFICATIONS:

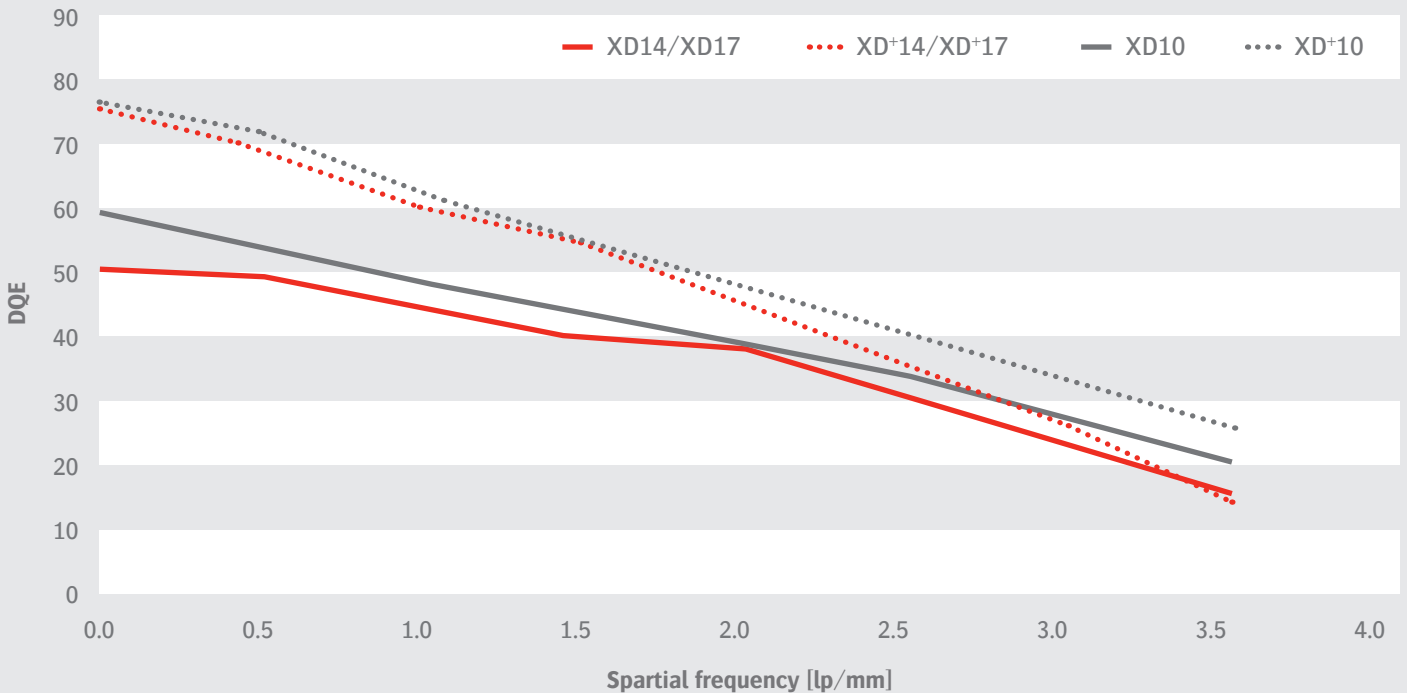

DURA-LINE FLAT PANEL DETECTOR

ORDER CODES (ABC CODES)

■ MAXXM	XD 14 DETECTOR (FXRD-3643VAW)
■ MAX1S	XD+ 14 DETECTOR (FXRD-3643VAW PLUS)
■ MA3YA	BATTERY CHARGER DURALINE (FXRC-04A)
■ MAX87	BATTERY PACK DURALINE (FXRB-04A)
■ MAX4Y	CRADLE CHARGER DURALINE (FXRR-01A)
■ MAX63	MINI-SCU BOX DURALINE (FXRS-04A)
■ MAX51	SCU-LITE DURALINE (FXRP-02A)
■ MAX75	TETHERED CABLE XD
■ MA3W5	XD/XD+ 14 CLICK ON HANDLE
■ MA3TY	XD/XD+ 14 GRID R 10:1, 132 L/INCH
■ MA3RU	XD/XD+ 14 GRID, R 6:1, 132 L/INCH
■ MA3SW	XD/XD+ 14 GRID, SD R:6-1, 132 L/INCH

For more information on Agfa, please visit our website on www.agfa.com ■

Agfa and the Agfa rhombus are trademarks of Agfa-Gevaert NV, Belgium, or its affiliates. MUSICA is a trademark of Agfa-Gevaert NV, Belgium, or its affiliates. All rights reserved. All information contained herein is intended for guidance purposes only, and characteristics of the products and services described in this publication can be changed at any time without notice. Products and services may not be available for your local area. Please contact your local sales representative for availability information. Agfa-Gevaert NV diligently strives to provide as accurate information as possible, but shall not be responsible for any typographical error.

© 2021 Agfa NV
All rights reserved
Published by Agfa NV
Septestraat 27 - 2640 Mortsel
Belgium

GB 00202105

AGFA 